

WIN

步步为赢

是一种态度的气势

IS AN ATTITUDE OF MOMENTUM



企业简介

BRIEF INTROUCTION



TEILONG

乐清市新光塑料有限公司座落于“中国电器之都”浙江省乐清市柳市新光工业区，与景色秀丽的国家级风景区一雁荡山风景区相邻，温州机场30公里；温州七里港口三公里，水陆空交通便利。公司拥有生产厂房5000平方米，现在员工200余人，固定资产达3000万元，年生产尼龙扎带2500吨，是华东地区最大的尼龙扎带生产企业之一。公司现有大型注塑机58台，包装机械25台。生产工艺先进、检测设备齐全、技术力量雄厚，产品均获ISO9001质量体系认证及计量器具许可证，先后通过了SGS环保等认证，产品远销美国，中东等国家和地区。

本公司专业生产和销售尼龙扎带(cable ties)、钢钉线卡、接线端子、定位片、压线帽、缠绕管、膨胀管、异型管等电线电缆配件，产品广泛应用于电子、机械、汽车、摩托、自行车等行业的捆绑之用，使用方便，价格合理。成为众多企业、商家采购同类产品的首选，更是大量进入欧美等发达国家的超市。

真诚希望我们能够携手合作，共同开拓更广阔的国际市场。

材质：用UL认可之尼龙66制成，防火等级94V-2。

颜色：标准颜色为本色(白色)，另有抗紫外线之黑色，还有多种彩色欢迎订做。


Yueqing City Xinguang plastic limited company is located in the "China Electric Capital" Zhejiang province Yueqing city Liushi Xinguang Industrial Zone, and the beautiful scenery of the state-level scenic spot - Yandangshan mountain scenic area adjacent to Wenzhou airport, 30 km; seven of the Wenzhou harbor three kilometers, terraqueous empty traffic is convenient. The company has a production plant 5000 square meters, now more than 200 employees, fixed assets amounts to 30000000 yuan, the annual production of 2500 tons of nylon Zhadai, in East China is the largest manufacturer of nylon zhadai. The company's existing large injection molding machine 58. Packaging machinery 25. Advanced production technology, testing equipment, strong technical force, the products are ISO9001 quality system certification and measurement apparatus permits, have passed the SGS environmental protection certification, products are exported to the United States, the Middle East and other countries and regions.

The company specializes in the production and sale of nylon Zhadai (cable ties), nail clips, terminals, the positioning piece, press line cap, winding pipe, expansion pipe, tube, wire and cable accessories, products widely used in electronics, machinery, automobile, motorcycle, bicycle and other industries tied with, easy to use, the price reasonable. Many enterprises become the preferred business procurement, similar products, is a lot more to enter Europe and the United States and other countries of the supermarket.

Sincere hope that we can work together, the co-development of a broader international market.

Material: Nylon 66 made by UL recognized, fire rating of 94V-2. Color:

standard color for the color (white), and ultraviolet resistant black, there are a variety of color welcome.

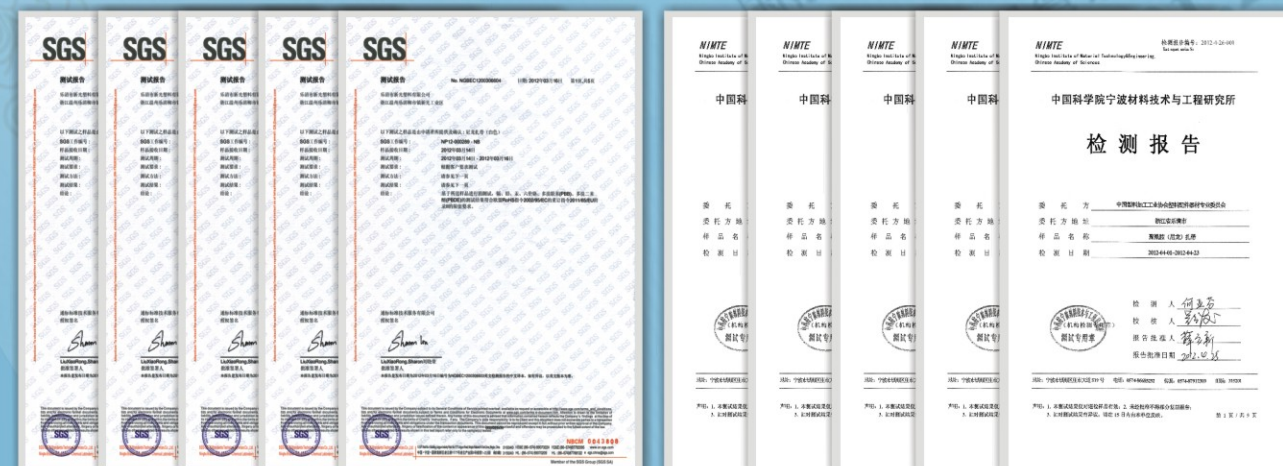

Nylon cable ties
尼龙扎线带




尼龍扎線帶
Nylon Cable tie

材質：採用UL認可之尼龍66料製成，防火等級94V-2，耐酸、耐蝕、絕緣性良好，不易老化，承受力強。

顏色：標準顏色為本色(白色)，另有抗紫外線之黑色，特殊顏色歡迎訂做。

Material:Nylon 66,94V-2 certificated by UL.Heat-resisting,erosion control,insulate well and not apt to age.

Color:Natural(or white,standard color), UV black and other colors are available as requested.

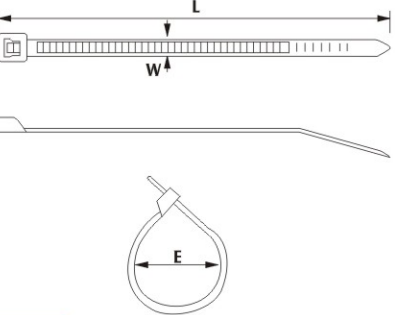

型號 ITEM NO.	長L		寬W MM	捆扎範圍E BUNDLE DIAMETER MM	承受力 TENSILE STRENGTH	
	INCH	MM			LBS	KGS
XGS-2.5×60	2.4"	60	2.5	2-11	18	8
XGS-2.5×80	3.2"	80		2-16		
XGS-2.5×100	4.0"	100		2-22		
XGS-2.5×120	4.7"	120		2-30		
XGS-2.5×150	6.0"	150		2-35		
XGS-2.5×200	8.0"	200		3-50		
XGS-3.6×150	6.0"	150	3.6	3-35	40	18
XGS-3.6×200	8.0"	200		3-50		
XGS-3.6×250	10"	250		3-65		
XGS-3.6×300	12"	300		3-80		
XGS-3.6×370	14.6"	370		3-105		
XGS-4.8×150	6.3"	150	4.8	3-40	50	22
XGS-4.8×200	8.0"	200		3-50		
XGS-4.8×250	10"	250		3-65		
XGS-4.8×300	12"	300		3-80		
XGS-4.8×350	14"	350		3-90		
XGS-4.8×370	14.6"	370		3-98		
XGS-4.8×400	16"	400	7.2	3-105	120	55
XGS-4.8×430	16.9"	430		3-120		
XGS-4.8×450	17.7"	450		3-130		
XGS-4.8×500	19.7"	500		3-150		
XGS-7.2×200	8.0"	200		3-50		
XGS-7.2×250	10"	250		4-65		
XGS-7.2×300	12"	300	9.0	4-80	175	79.4
XGS-7.2×350	14"	350		4-90		
XGS-7.2×400	16"	400		4-105		
XGS-7.2×450	18"	450		4-110		
XGS-7.2×500	20"	500		4-150		
XGS-7.2×550	21.6"	550		4-165		
XGS-9.0×400	16"	400	9.0	8-105	175	79.4
XGS-9.0×450	18"	450		8-118		
XGS-9.0×500	20"	500		8-150		
XGS-9.0×550	21.6"	550		8-160		
XGS-9.0×600	23.6"	600		8-170		
XGS-9.0×650	25.6"	650		8-185		
XGS-9.0×720	28.3"	720		10-195		
XGS-9.0×800	31.5"	800		10-230		
XGS-9.0×900	35.5"	900		10-265		
XGS-9.0×1000	29.4"	1000		10-300		
XGS-9.0×1200	47.2"	1200		10-370		

Mountable Head Ties
固定头式扎线带




固定頭式扎線帶
Mountable Head Ties

材質：採用UL認可之尼龍66料製成。

特點：扎帶捆扎電線后，將整束電線用螺絲固定于基板上。

Material:Nylon 66 certificated by UL.


Usage:after bundling wires,fix them on plate with screw.

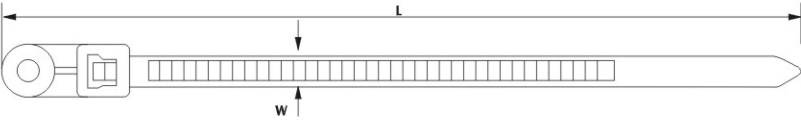

型號 ITEM NO.	長L		寬W MM	捆扎範圍E BUNDLE DIAMETER MM	承受力 TENSILE STRENGTH		包裝 PACKING
	INCH	MM			LBS	KGS	
XGS-150MH	6"	150	3.6	32	40	18	100PCS
XGS-200MH	8"	200	4.8	42	50	22	100PCS

Kont ties(Ball Type)

珠孔扎线带

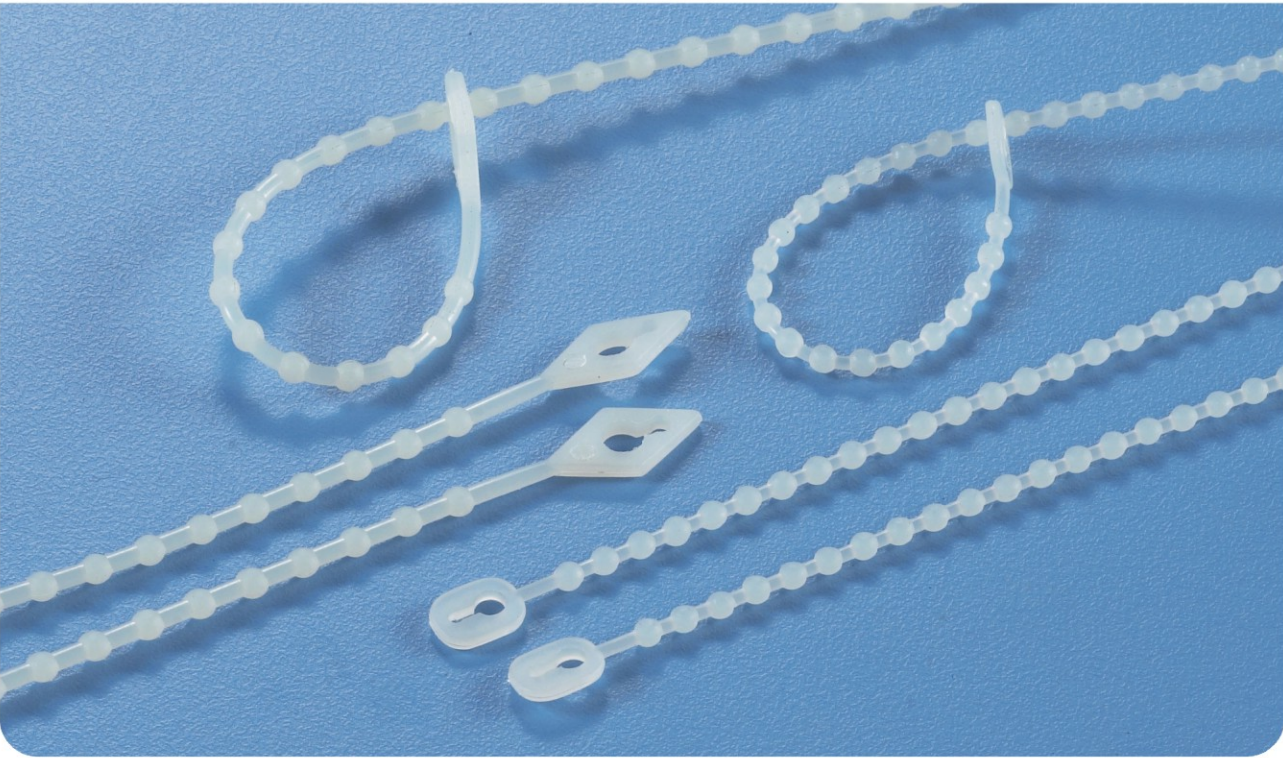

珠孔扎線帶
Kont ties(Ball Type)

材質：UL合格之NYLON 66（本色），防火等級94V-2。
用途：一般電源線之綁扎，可再松開重複使用。


Material:Nylon 66 certificated by UL.
Usage:Beaded design keeps wires from shifting or slipping.



型號 ITEM NO.	長L		寬W MM	捆扎範圍E BUNDLE DIAMETER MM	承受力 TENSILE STRENGTH		包裝 PACKING
	INCH	MM			LBS	KGS	
XGS-100KT	4"	100	=	25	18	8	100PCS
XGS-120KT	4"	100	=	30	18	8	100PCS
XGS-150KT	8"	150	=	39	30	14	100PCS

Marker Ties


标牌扎线带

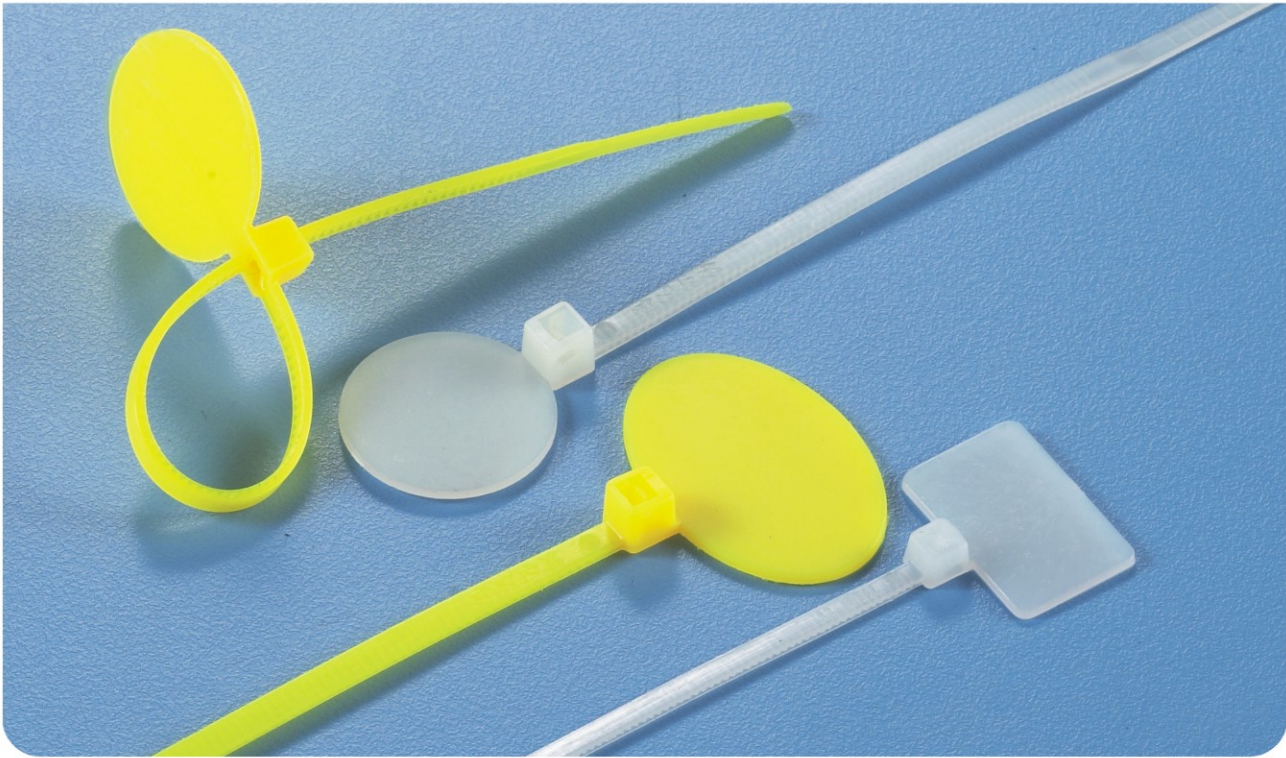

標牌扎線帶
Marker Ties

材質：採用UL認可之尼龍66料製成，防火等級94V-2，耐酸，耐蝕，不易老化。
特點：扎帶前端設有空白標牌，可用筆在上面標志記號。


Material:Nylon 66 94V-2 certificated by UL.Acid-control and not easy to age.
Usage:No bland tag at the entrance of cable tie,then write down the marker on the tag.

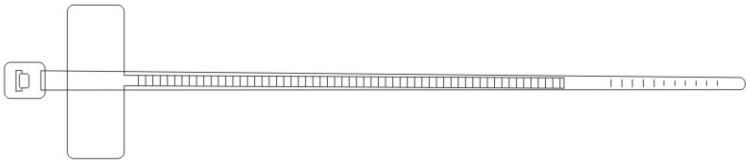

型號 ITEM NO.	長L		寬W MM	捆扎範圍E BUNDLE DIAMETER MM	承受力 TENSILE STRENGTH		標牌尺寸 MM
	INCH	MM			LBS	KGS	
XGS-100MT	4"	100	2.5	22	18	8.0	22×5
XGS-110MT	4.4"	110	2.5	22	18	8.0	10×22
XGS-150MT	6"	150	3.0	32	40	18	12×25
XGS-200MT	8"	150	3.0	42	40	18	12×25

Push Mount ties

插销式扎线带

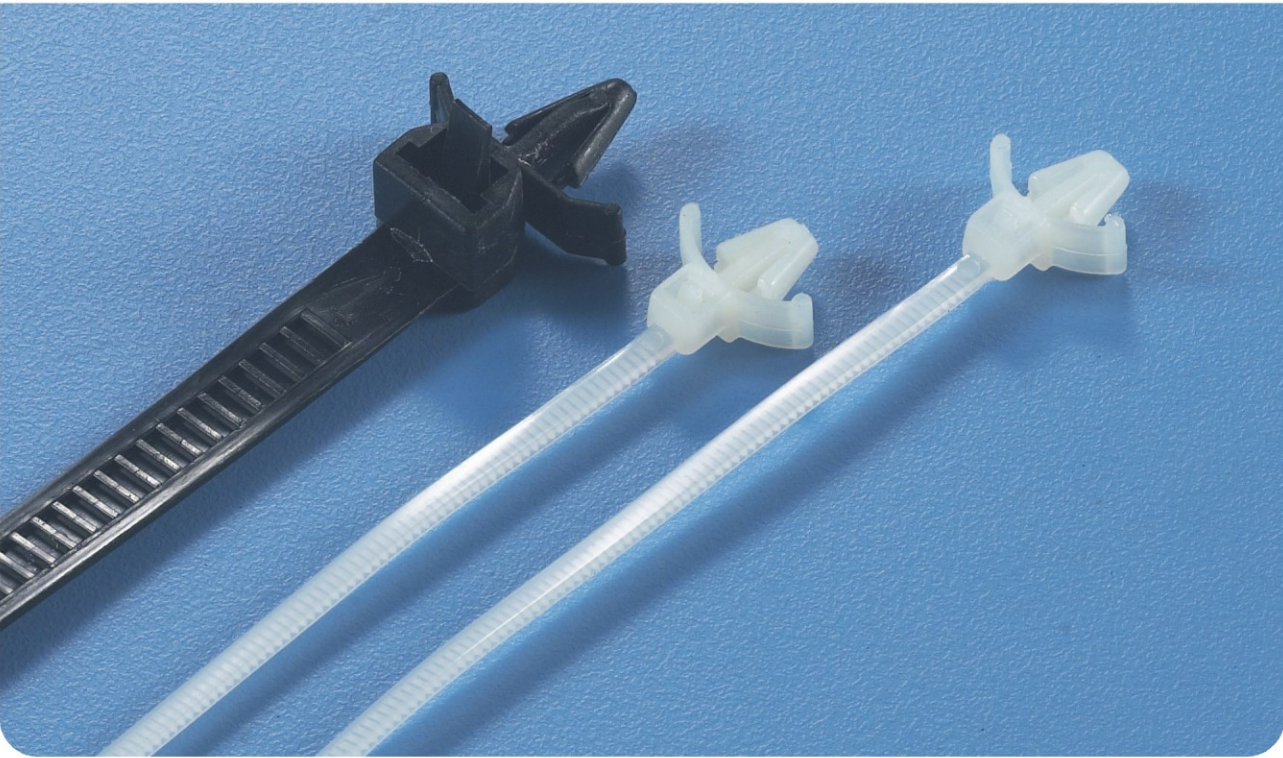


插销式扎线带

Push Mount ties

材質：采用UL認可之尼龍66料製成，防火等級94V-2，耐酸，耐蝕，絕緣性良好、不易老化、承受力強。
使用方法：先將機板鑽孔，然后把扎帶插入孔內，再將電線扎緊即可。


Material: Nylon 94V-2, agree by UL. Acid and corrodc resisting, insulate, last long and not apt to age.
Usage: insert tie to the hole of table and fasten it.

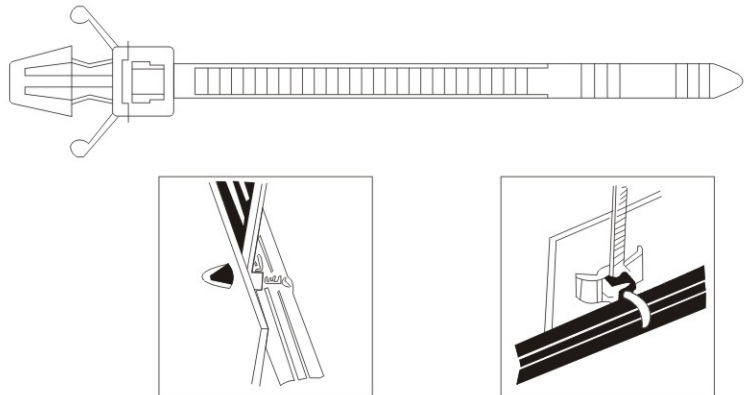

型號 ITEM NO.	長L		寬W MM	(最大)捆扎範圍 MAX. BUNDLE DIA. MM	承受力 TENSILE STRENGTH		孔徑(Φ) HOLE DIA		板機厚度 PANEL THICKNESS		包裝 PACKING
	INCH	MM			LBS	KGS	INCH	MM	INCH	MM	
XGS-100PT	4"	100	2.5	22	18	8.0	0.189	4.8	0.094	2.4	100PCS

Releasible Cable ties

可松式扎线带

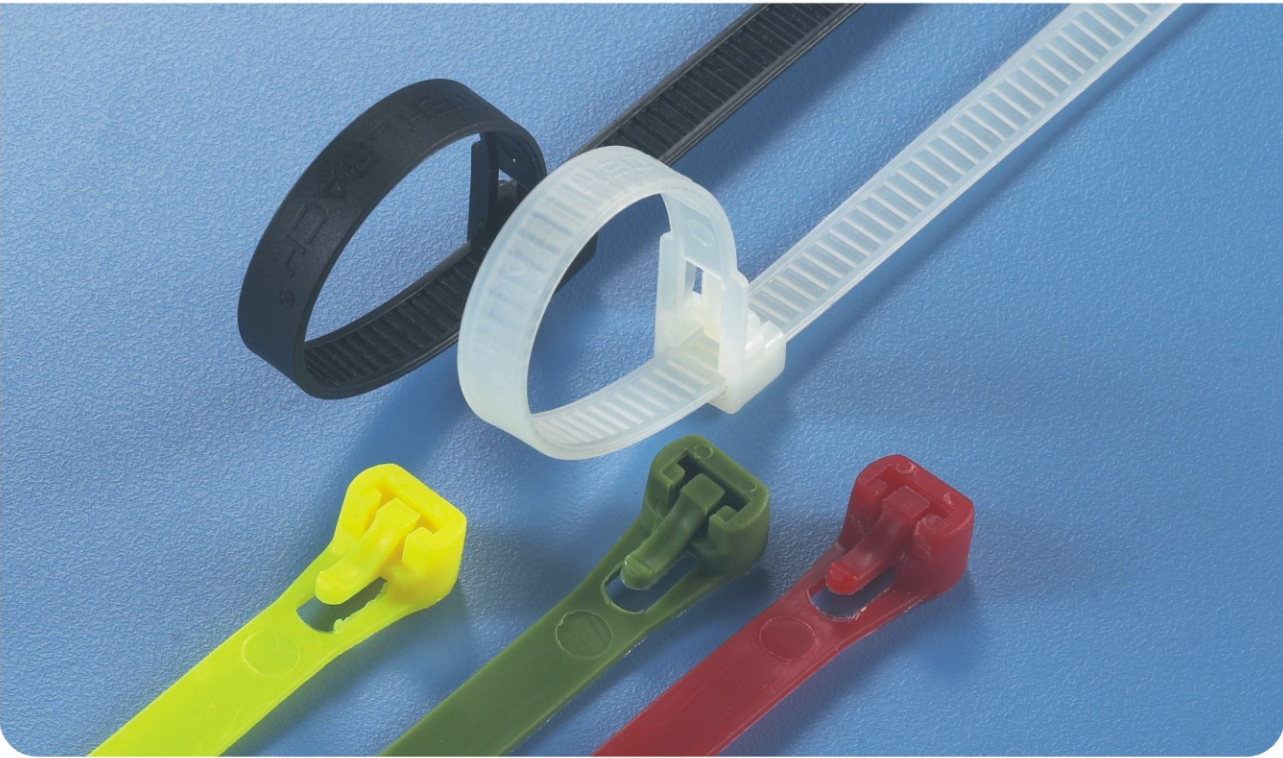


可松式扎线带

Releasible Cable ties

材質：采用UL認可之尼龍66料製成。
特點：扎帶捆扎電線后，將整束電線用螺絲固定于基板上。

Material: Nylon 66 certificated by UL.
Usage: after bundling wires, fix them on plate with screw.



型號 ITEM NO.	長L		寬W MM	捆扎範圍E BUNDLE DIAMETER MM	承受力 TENSILE STRENGTH		包裝 PACKING
	INCH	MM			LBS	KGS	
XGS-150RT	6"	150	7.2	35	50	22	100PCS
XGS-200RT	8"	200	7.2	50	50	22	100PCS
XGS-250RT	10"	250	7.2	65	50	22	100PCS
XGS-300RT	12"	300	7.2	70	50	22	100PCS

Double Locking Cable ties


双扣式扎线带



雙扣式扎線帶
Double Locking Cable ties

材質：採用UL認可之尼龍12(黑色)料製成，防火
等級94V-2，耐酸、耐蝕，不易老化。
特點：雙鎖式設計、承受力特強。

Material: Nylon 12 94V-2 certificated by UL. Acid-control and not
easy to age.
Usage: double locking, strong supporting capacity.

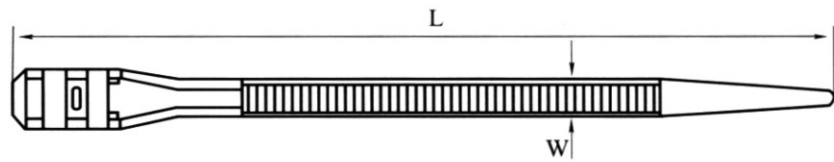

型號 ITEM NO.	長L		寬W MM	(最大)捆扎範圍 MAX.BUNDLE DIA.MM	拉力 TENSILE STRENGTH	
	INCH	MM			LBS	KGS
XGS-115DL	5 1/8"	125	6.0	22	77	35
XGS-180DL	7"	180	6.0	45	77	35
XGS-180DDL	7"	180	9.0	45	88	40
XGS-260DL	10 1/4"	260	9.0	66	110	50
XGS-350DL	13 5/8"	350	9.0	90	110	50

Cable ties

尼龙扎带



Spiral Wrapping Band
卷式結束帶



卷式結束帶
Spiral Wrapping Band


材質：採用PE料製成。
使用方法：先用保護帶固定起點一端，然後按順時針方向環繞豎緊，即可將電線束為一體。
用途：做為保護電線不受磨損及絕緣用，並可改進電線彎曲的美觀。

Material:Made from PE.
Usage:fix one end with safety belt first,then circle the wires clockwise to make them tighen.
Application:a protection wear for electric wires,and make them insulation ans look nice.



型號 ITEM NO.	內 徑 D	外 徑 D1	螺 距 W	結束可能範圍 WRAPPING RANGE (mmΦ)	包裝 PACKING
XGS-6	4	6	7.0	4×50	10m
XGS-8	6	8	10.8	6×60	
XGS-10	7.5	10	11.4	7.5×60	
XGS-12	9	12	13.9	9×65	
XGS-16	13	16	15.0	12×70	
XGS-20	16	20	18.2	15×100	
XGS-25	21	25	19.6	20×130	

PVC Trunking
兰灰色绝缘配线槽

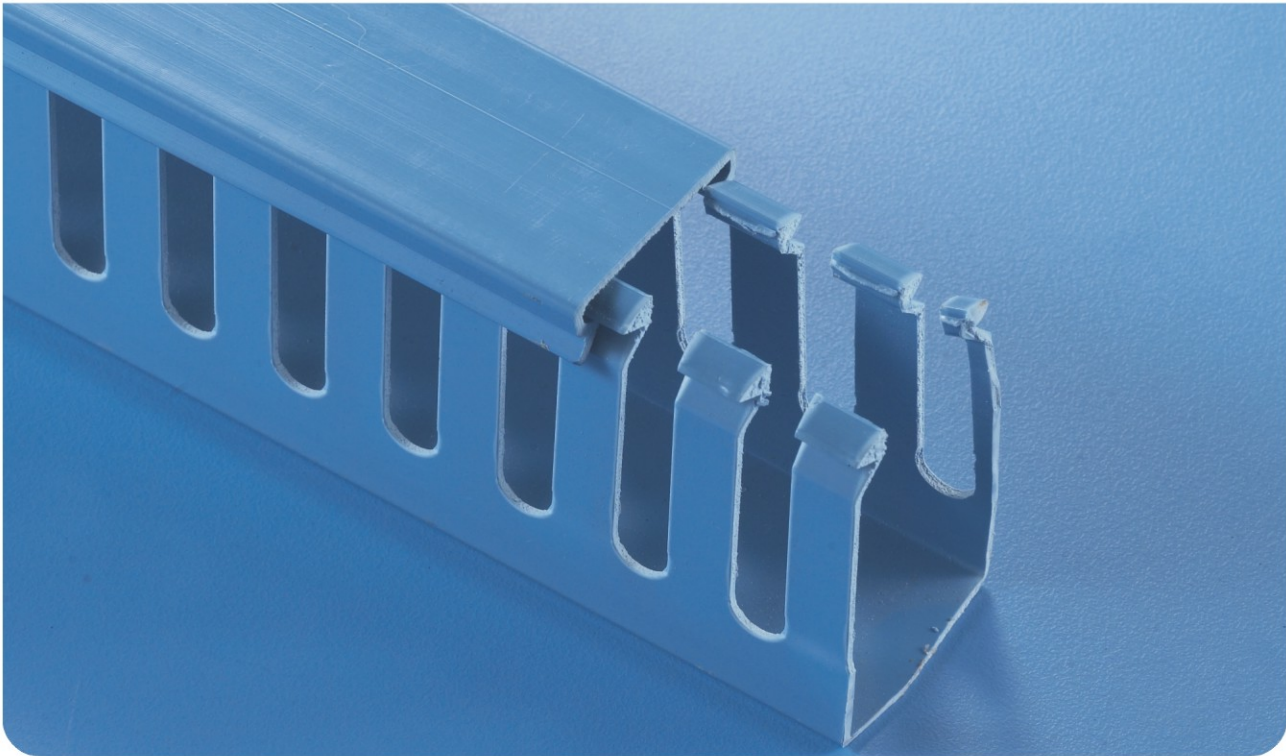


蘭灰色絕緣配線槽
PVC Trunking

材質：南亞硬質PVC(灰色)，絕緣性良好，不自燃，而溫至85℃。
構造：由槽底及槽蓋兩部分組成，底槽兩側設出線孔。

Material:Made from PVC(grey),good insulation and heat-resiting Up to 85℃

Struction:Made up of duct bottom and lid, With two-holes designd at the bottom.




型號規格 PXC3-	單價 / 每米	包裝數量	長度
20×15	2.40	200	2 M
20×20	2.70	200	
20×25	3.00	100	
25×25	3.00	100	
30×15	2.80	200	
30×20	3.00	100	
30×25	3.20	100	
30×30	3.40	100	
30×35	3.60	100	
30×40	4.00	100	
30×50	5.00	100	
35×25	3.40	100	
35×30	3.60	100	
35×35	4.00	100	
35×40	4.00	100	
40×25	3.80	100	
40×30	4.00	100	
40×35	4.00	100	
40×40	4.20	100	
45×45	5.00	100	
50×20	4.00	100	
50×25	4.00	100	
50×30	4.20	100	

Nylon Cable Gland
尼龙电缆接头



尼龍電纜接頭
Nylon Cable Gland

材質：尼龍塑料
密封蓋：丁腈橡膠(NBR)
保護等級：IP67-5巴壓力
旋緊部位，並使用O-密封圈
靜態-40℃至100℃，短時至℃
動態-20℃至80℃，瞬間可耐熱至100℃
顏色種類：灰色、黑色、其他顏色可定做

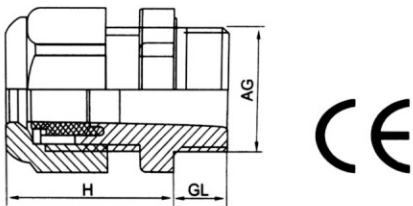

IP67防塵，防水測試合格
IP67 dust-proof, water
proof testing qualified


AG PG	 mm	GL mm	H mm	 mm	單價/只
7	3-3.6	8	22	16	0.32
7	2-5	8	22	16	0.32
9	4-8	8	26	19	0.42
9	2-6	8	26	19	0.42
11	5-10	8	27	22	0.50
11	3-7	8	27	22	0.50
13.5	6-12	9	28	24	0.60
13.5	5-9	9	28	24	0.60
16	10-14	10	30	27	0.76
16	7-12	10	30	27	0.76
19	12-15	10	30	27/28	0.90
19	10-12	10	30	27/28	0.90
21	13-18	10	35	33	0.11
21	9-16	10	35	33	0.11
25	16-21	11	34	35/36	1.0
25	13-18	11	34	35/36	1.50
29	18-25	12	40	41/42	2.10
29	13-20	12	40	41/42	2.10
36	22-32	14	48	52/53	3.80
36	20-26	14	48	52/53	3.80
42	32-38	14	49	60/61	5.00
42	25-31	14	49	60/61	5.00
48	37-44	14	50	64/65	6.00
48	29-35	14	50	64/65	6.00
63	42-50	27	60	72	11.00

Stainless Steel Cable Tie
不锈钢扎带




不鏽鋼扎帶
Stainless Steel Cable Tie

- 以上持有規格之不鏽鋼扎帶的帶身皆可噴塑。
- 所有噴塑產品的編號另加“P”，如“SST-100P”或“HST-100P”。
- The body of the above specification stainless steel cable ties can be plastic-coating.
- All item No. of plastic-coating products should plus“P”,such as“SST-100P”or“HST-100P”.

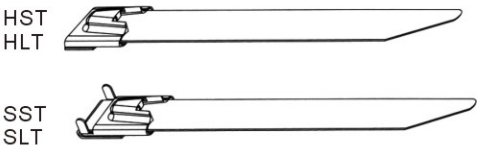

編號 ITEM NO.	長 (mm)	寬 (mm)	(最大)捆扎 範圍(mm)	拉力		材質 MATERIAL
				LBS	KGS	
HST-100	100	4.6	22	100	46	AISI.304
HST-152	152	4.6	35	100	46	
HST-200	200	4.6	50	100	46	
HST-300	300	4.6	80	100	46	
HST-360	360	4.6	95	100	46	
HST-520	520	4.6	150	100	46	
HST-680	680	4.6	195	100	46	
HST-840	840	4.6	250	100	46	
HST-1050	1050	4.6	285	100	46	
HLT-152	152	7.9	35	145	65	
HLT-200	200	7.9	50	145	65	
HLT-300	300	7.9	80	145	65	
HLT-360	360	7.9	95	145	65	
HLT-520	520	7.9	150	145	65	
HLT-680	680	7.9	195	145	65	
HLT-840	840	7.9	250	145	65	
HLT-1050	1050	7.9	285	145	65	
SST-100	100	4.6	22	100	46	
SST-152	152	4.6	35	100	46	
SST-200	200	4.6	50	100	46	
SST-300	300	4.6	80	100	46	
SST-360	360	4.6	95	100	46	
SST-520	520	4.6	150	100	46	
SST-680	680	4.6	195	100	46	
SST-840	840	4.6	250	100	46	
SST-1050	1050	4.6	285	100	46	
SLT-152	152	7.9	35	145	65	
SLT-200	200	7.9	50	145	65	
SLT-300	300	7.9	80	145	65	
SLT-360	360	7.9	95	145	65	
SLT-520	520	7.9	150	145	65	
SLT-680	680	7.9	195	145	65	
SLT-840	840	7.9	250	145	65	
SLT-1050	1050	7.9	285	145	65	

Tile Spacer
瓷磚塑料十字定位架

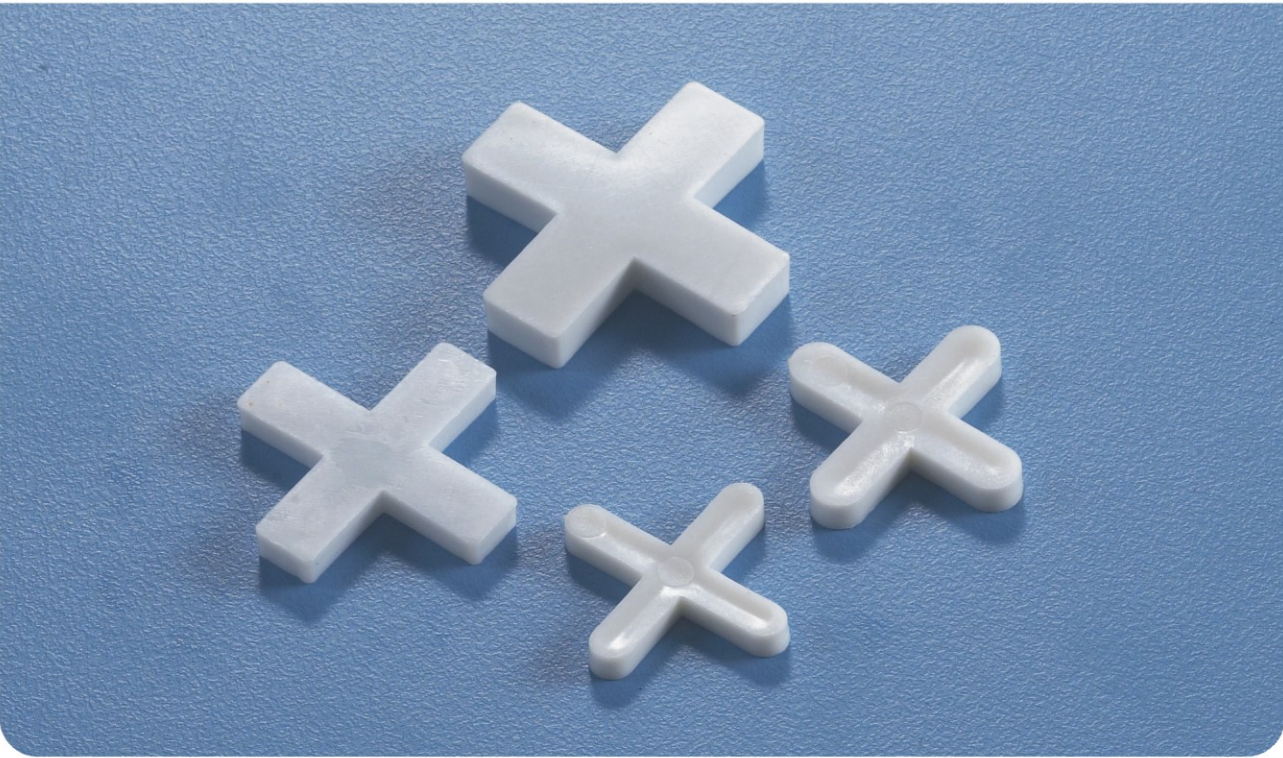

瓷磚塑料十字定位架
Tile Spacer

規格	Width	length	Higth	Standard packing	N. W.(KGS)	G. W.(WGS)	Carton Size
1.5 II	1.5 II	14.8 II	2.1 II	200PCS/BAG,500BAG/GTH	9.00	10.00	45*30*30cm
2.0 II	2.0 II	14.8 II	2.1 II	200PCS/BAG,500BAG/GTH	10.00	11.00	
2.5 II	2.5 II	16.7 II	2.1 II	200PCS/BAG,400BAG/GTH	12.00	13.00	
3.0 II	3.0 II	17.5 II	2.2 II	200PCS/BAG,300BAG/GTH	12.00	13.00	
4.0 II	3.8 II	20.8 II	2.4 II	200PCS/BAG,250BAG/GTH	15.00	16.00	54*30*30cm
5.0 II	4.8 II	22.0 II	2.9 II	200PCS/BAG,200BAG/GTH	18.00	19.00	
6.0 II	5.9 II	24.5 II	3.0 II	200PCS/BAG,120BAG/GTH	11.00	12.00	
8.0 II	7.8 II	28.4 II	4.5 II	200PCS/BAG,60BAG/GTH	10.00	11.00	

Zip Tie
粘扣式扎线带



粘扣式扎線帶
Zip Tie


材質：母面PP，公面NYLON黑色(備有紅、黃、綠)。
用途：適用於網絡線(UTP/STP/Fiber)、訊號線、電源線之束綁，避免使用傳統尼龍扎線帶時，因過緊而影響傳輸速度，可重複使用。

Material:Made of PP,the public face NYLON black(with red, yellow,blue,green).
Use:apply to the network cable(UTP/STP/Fiber),signal lines, power lines beam up,to avoid the use of traditional nylon Assorted cable,and the impact of tight due to transmission speed,can be reused.

型號 ITEM NO.	長(mm)	寬(mm)	最大束線徑	備注
XGS-125	125	12	30	特殊規格可訂做
XGS-135	135	12	33	
XGS-180	180	12	40	
XGS-210	210	16	50	
XGS-310	310	16	85	


Terminal Blocks

接线端子

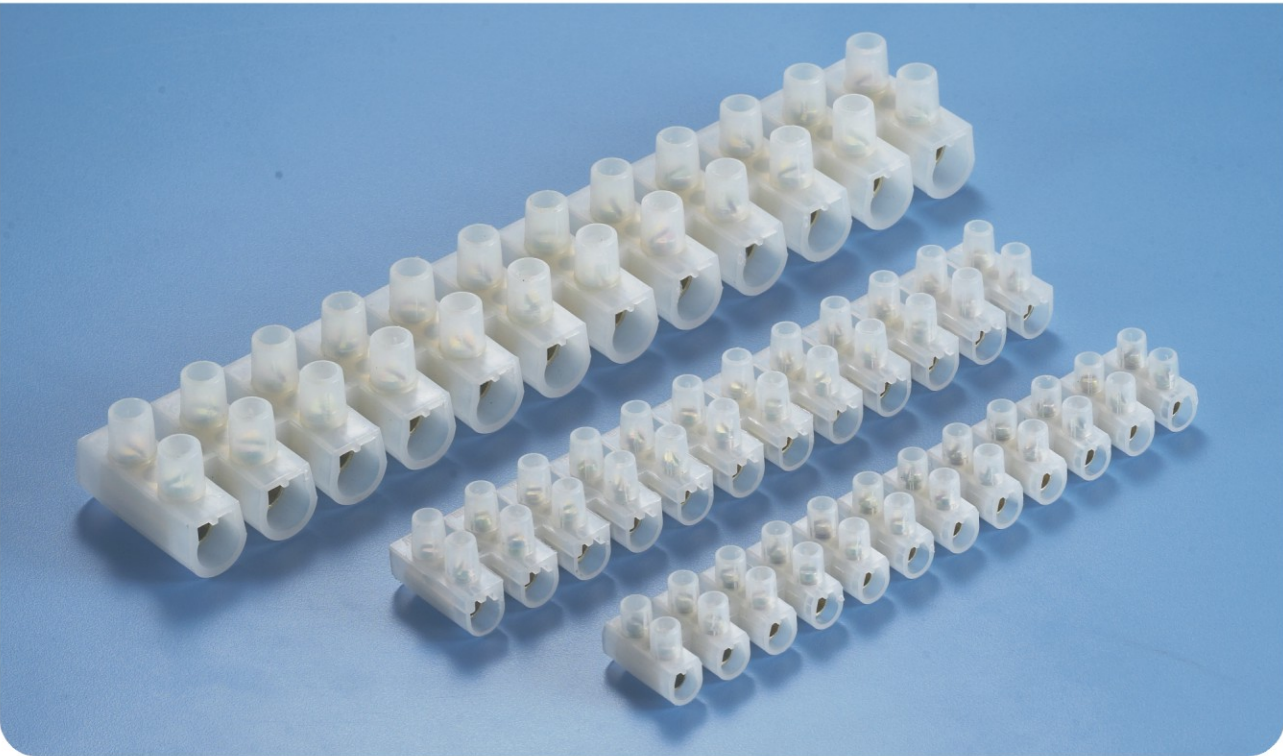

接線端子
Terminal Blocks


接線端子: H,U(W),V(F)
材質: 採用PA、PE或PP料製成。
Terminal blocksh,U(W),V(F)Type
Material:made from PA,PE or PP.

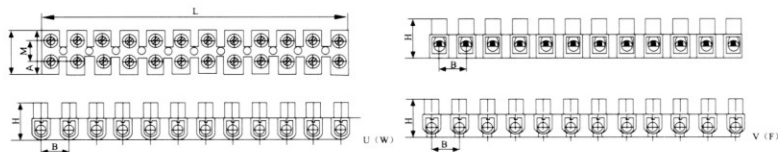

型號 ITEM NO.	L	A	H	M	B	mm ²	VOLT	AMP	包裝 PACKING
XGS-3A	93	16	12	6	8	4	400V	3A	10PCS
XGS-6A	115	157	13	6.5	9.5	6	400V	6A	
XGS-10A	126	20.2	15.5	8.4	10.5	10	400V	10A	
XGS-16A	139	23	17.7	10.3	12	12	400V	16A	
XGS-20A	155	25	19.2	11.5	13.5	14	400V	20A	
XGS-30A	171	25	20.5	12	14.8	16	400V	30A	
XGS-60A	192	30	26	13.5	16.5	25	400V	60A	
XGS-80A	205	33	27	15	17	35	400V	80A	
XGS-100A	250	46	31	22	21	40	400V	100A	

Cable Tie Mounts


粘式扎线固定座

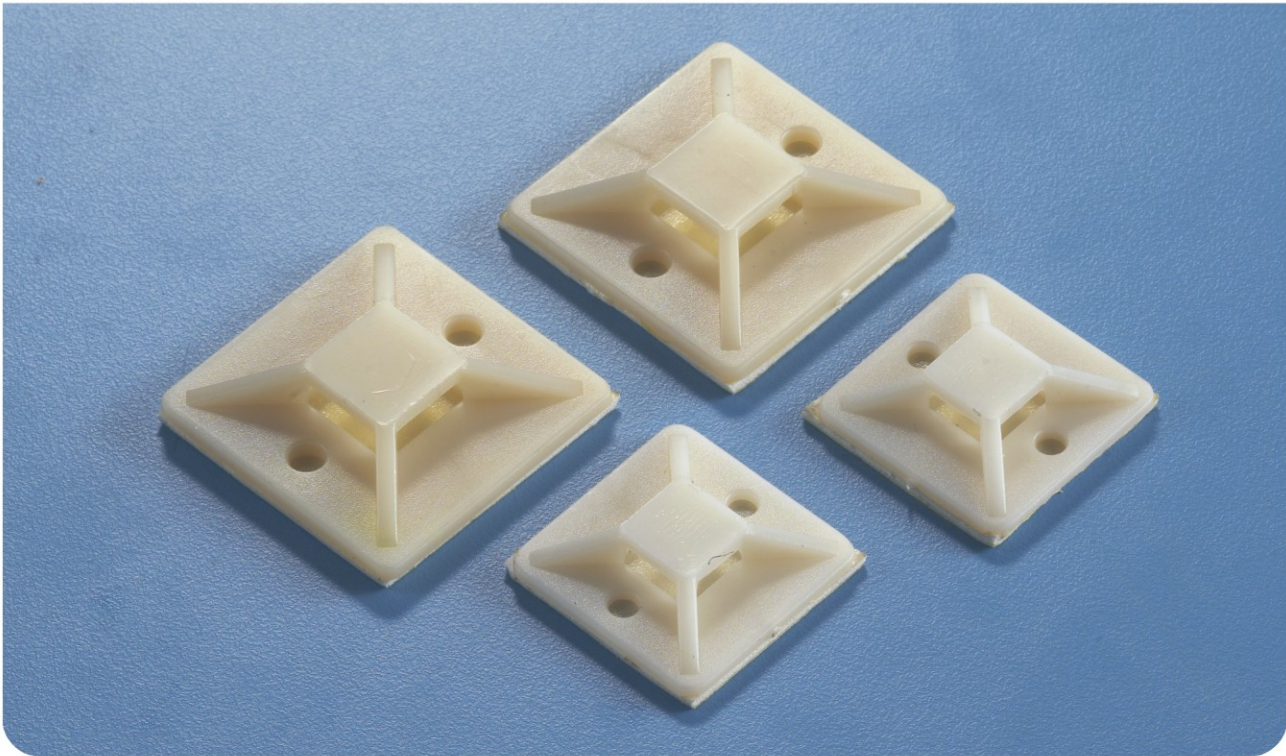

粘式扎線固定座
Cable Tie Mounts

材質: 採用UL認可之尼龍66料製成, 防火等級
94V-2, 背附進口海棉膠, 絕緣性能良好、
持久性、不易老化。
使用方法: 將定位片海棉膠撕開, 貼天機板固定,
再用扎帶捆扎電線。
用途: 省時、簡便、供面板不可以鑽孔時使用。


Material:UL approved Nylon 66,94V-2,With imprrted adhesivesticker.
Good insulation,long lasting and uneasy to age.
How to use:Remove the cover of the adhesive and stick the piece
properly,then put in cable tie tor using.
Application:Used where hole-drilling is not allowed,allowed,easy and
time-saving.

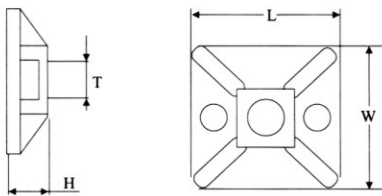

型號 ITEM NO.	長×寬 L×W(MM)	高H MM	帶孔T MM	外箱尺寸 CM	數量 PCS/CTN	毛重/淨重 KG
XGS-20	20×20	6.1	5.0	52×35×36	20000	20/18
XGS-25	25×25	7.5	6.2	52×35×36	20000	19/17
XGS-30	30×30	8.7	6.4	54×33×32	20000	18/16
XGS-40	40×40	6.4	10.8	54×35×32	20000	17/15

Circle Cable Clips


圓型鋼釘線卡系列

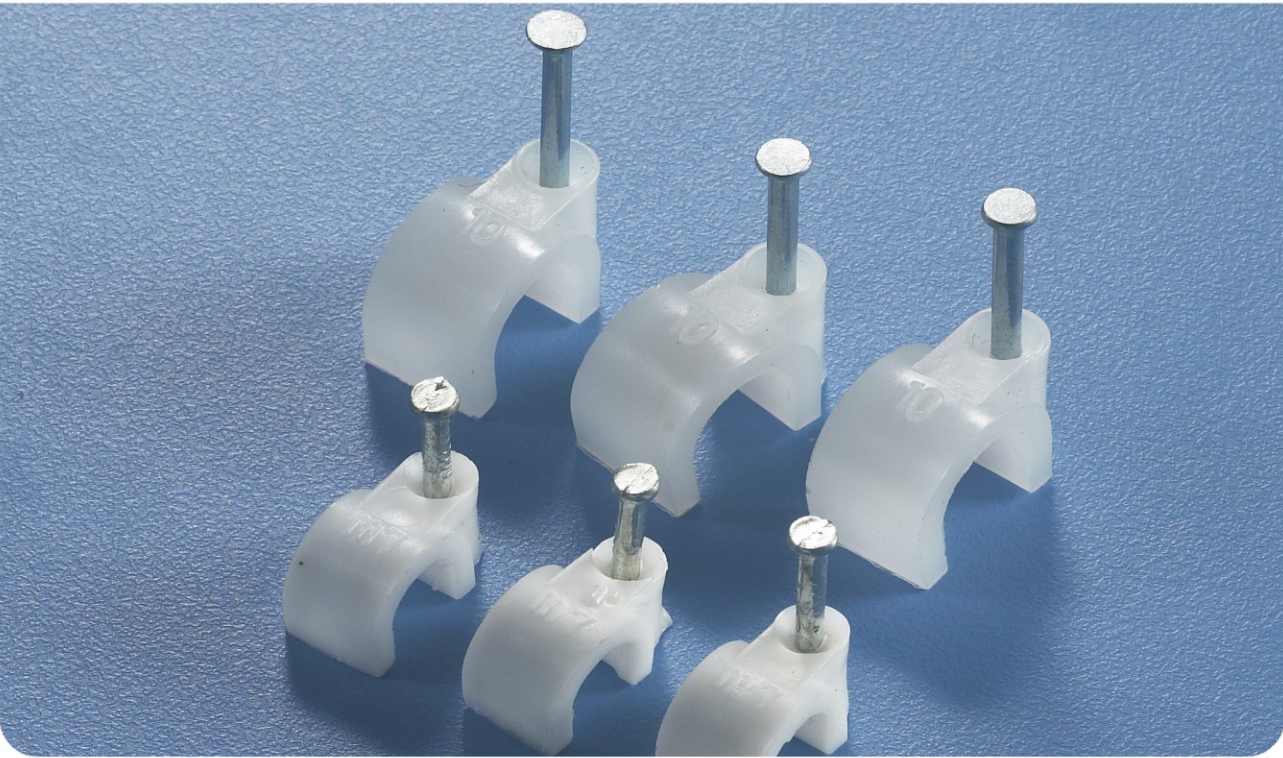

圓型鋼釘線卡系列
Circle Cable Clips

材質：采用PP材料製成，附鋼釘。
使用方法：將電線置于卡內，用鐵垂將鋼釘
釘上牆壁上，即可將電線固定。
用途：一般室內配線固定電線用。


Material: PP, Steel nail.
How to use: Put the cable under the clip
and hammer the nail into the wall to
secure the cable.
Application: Securing of cables for general
indoor wiring.



型號 ITEM NO.	高H MM	圓徑R MM	鋼釘Nail MM	包裝 PACKING
4mm	5.3	4	1.7×15	100PCS
5mm	6.5	5	1.7×15	
6mm	8.1	6	1.7×17	
7mm	8.7	7	1.8×19	
8mm	9.6	8	1.9×21	
9mm	10.7	9	2.0×22	
10mm	11.7	10	2.05×25	
12mm	12.8	12	2.05×27	
14mm	14.9	14	2.4×32	
16mm	16.9	16	2.5×35	
18mm	20.8	18	2.5×37	
20mm	23.6	20	2.8×42	
22mm	25.0	22	2.8×48	
25mm	27.7	25	3.2×48	
30mm	33.1	30	3.2×53	
35mm	36.6	35	3.2×58	
40mm	45.2	40	3.4×60	

Square Cable Clips


方型鋼釘線卡系列

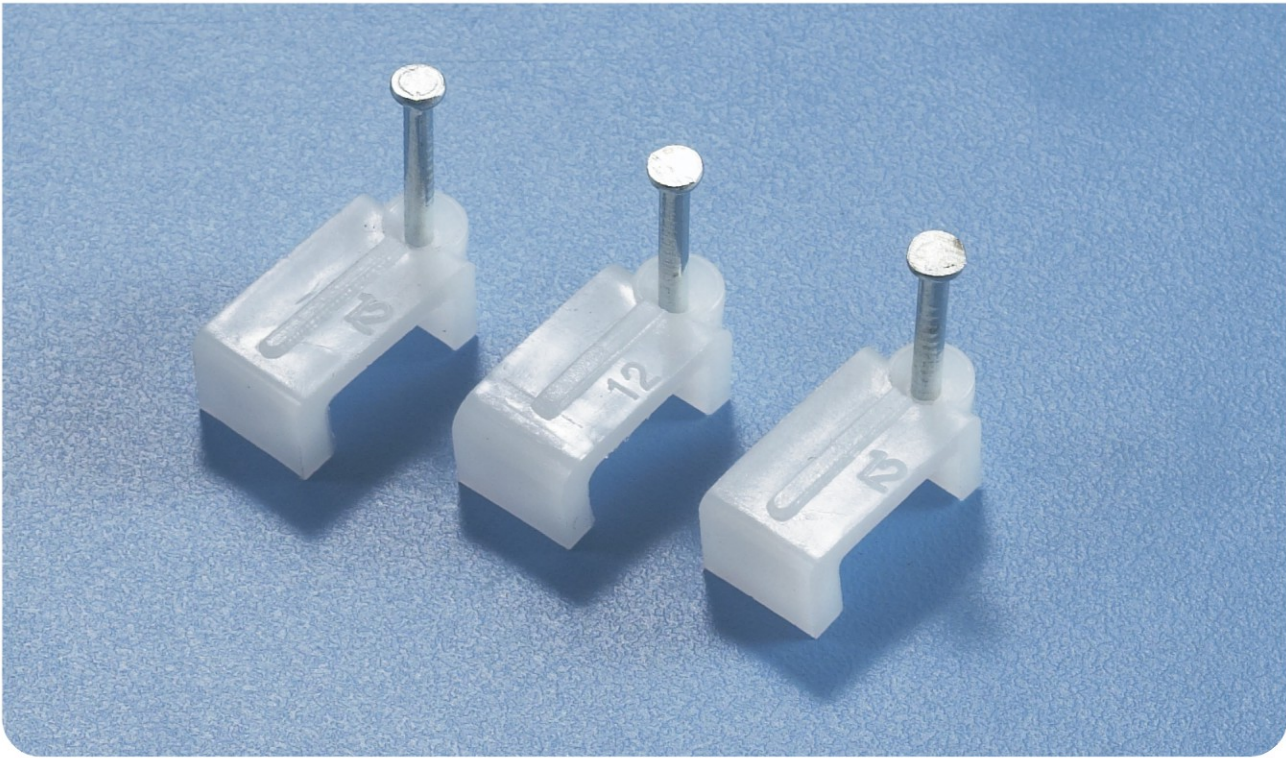

方型鋼釘線卡系列
Square Cable Clips

材質：采用PP材料製成，附鋼釘。
使用方法：將電線置于卡內，用鐵垂將鋼釘
釘上牆壁上，即可將電線固定。
用途：一般室內配線固定電線用。

Material: PP, Steel nail.
How to use: Put the cable under the clip
and hammer the nail into the wall to
secure the cable.
Application: Securing of cables for general
indoor wiring.




型號 ITEM NO.	外高H MM	內徑		鋼釘Nail MM	包裝 PACKING
		H1(MM)	R(MM)		
4mm	6.0	3.8	4	1.7×15	100PCS
5mm	6.0	3.8	5	1.7×15	
6mm	6.5	4.1	6	1.7×16	
7mm	7.0	4.7	7	1.9×18	
8mm	7.5	5.0	8	2.05×20	
9mm	8.2	5.4	9	2.05×23	
10mm	8.6	5.7	10	2.3×23	
12mm	9.0	6.1	12	2.3×25	
14mm	11.2	6.5	14	2.4×30	

Cable Puller(Nylon)

穿墙线(尼龙)



穿牆線(尼龍)
Cable Puller(Nylon)

Colr Availabe	Code	Length(M)	Diam(mm)	Meas(cm)	Pcs/Ctn	N.w.(kg)	Spring Available
 black	EF1305	5	Φ3	50×50×24	200	12	
	EF1310	10	Φ3		150	12	
	EF1315	15	Φ3		100	12	
	EF1320	20	Φ3		80	13	
	EF1325	25	Φ3		70	14	
	EF1330	30	Φ3		60	12	
	EF1405	5	Φ4		200	13	
	EF1410	10	Φ4		100	13	
	EF1415	15	Φ4		80	13	
	EF1420	20	Φ4		50	13	
 yellow	EF1330	30	Φ3		60	12	
 red	EF1405	5	Φ4		200	13	
	EF1410	10	Φ4		100	13	
 blue	EF1415	15	Φ4		80	13	
	EF1420	20	Φ4		50	13	
	EF1425	25	Φ4		45	13	
	EF1430	30	Φ4		40	13	

Wire Connectors--(Φ3-Φ8)


弹簧螺式接线头XG-(Φ3-Φ8)



彈簧螺式接線頭XG-(Φ3-Φ8)
Wire Connectors--(Φ3-Φ8)

材質：采用PVC製成，內有螺紋，耐熱、絕緣。
使用方法：將電線外皮剝去部分，將所有接的電線，同時插入扭緊即可。
用途：電器製品之優良接線器。

Material:PVC,threaded,Heat-resistang asd insulating.
How to use:Put the joint of two wires into the cap and screw if in until it is fasten,wall to secure the cable.
Application:Wire joining.

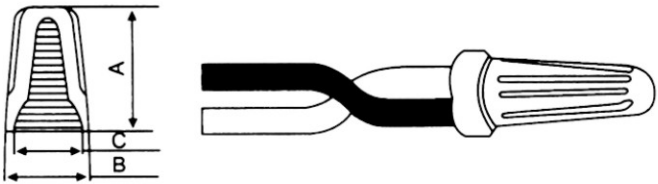


型號 ITEM NO.	高A (mm)	寬B (mm)	螺紋內徑C (mm)	適用電線圍 Approx Wire Size	包裝 Std.PKg.
XGS-P71	14.9	8.6	4.0	最小2條#18線 最大3條#18線	100PCS及 1000PCS
XGS-P72	17.8	10.7	4.0	最小2條#18線 最大3條#18線	
XGS-P73	21.9	10.8	4.48	最小2條#18線 最大3條#18線	100PCS及 500PCS
XGS-P1	24.6	12.8	6.1	最小2條#18線 最大3條#18線	
XGS-P2	30.1	15.3	7.0	最小2條#18線 最大3條#18線	100PCS及 500PCS

Expand Nails
XG膨胀管



XG膨胀管
Expand Nails

材質：采用PE料製成。
顏色：白色。
Material: Made of PE.
Color: White.

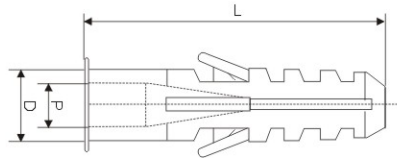

型號 ITEM NO.	長 L (mm)	外徑 D (mm)	內徑 d (mm)	包裝 PACKING
XGS-06	29.8	6.0	4.9	100pcs
XGS-08	38.6	7.9	5.3	
XGS-10	42.7	9.9	5.8	
XGS-12	47.9	11.6	6.3	


R Type Cable Clamps
R型固定夾



R型固定夾
R Type Cable Clamps

材質：UL認可尼龍66，防火等級94V-2，
可重複使用。
使用方法：將電線置于固定扣內，在以
螺絲固定。


Material: Nylon 66 94V-2 agreed by UL
Usage: Put cable in fix by serew.



型號 ITEM NO.	A(mm)	B(mm)	C(mm)		D(mm)	包裝 PACKING
			mm	inch		
XGS-1/8R	9.5	9.6	3.2	1/8"	19.8	100PCS
XGS-3/16R	9.6	9.6	4.8	3/16"	19.8	
XGS-1/4R	12.0	10.0	6.35	1/4"	22.0	
XGS-5/16R	12.0	10.0	7.9	5/16"	22.0	
XGS-1/8R	12.5	12.0	9.5	3/8"	24.0	
XGS-1/2R	15.2	12.0	12.7	1/2"	31.0	
XGS-8R	18.2	12.6	15.8	5/8"	34.3	
XGS-4R	18.2	12.6	19.4	3/4"	35.0	
XGS-1R	22.5	12.0	25.4	1"	43.0	
XGS-17/16R	24.0	12.0	27.5	17/16"	50.0	
XGS-5/4R	26.2	12.0	31.8	11/4"	46.2	
XGS-3/2R	30.0	12.0	36.7	12/2"	50.0	

Cable Tie Holder


XG扎带固定座

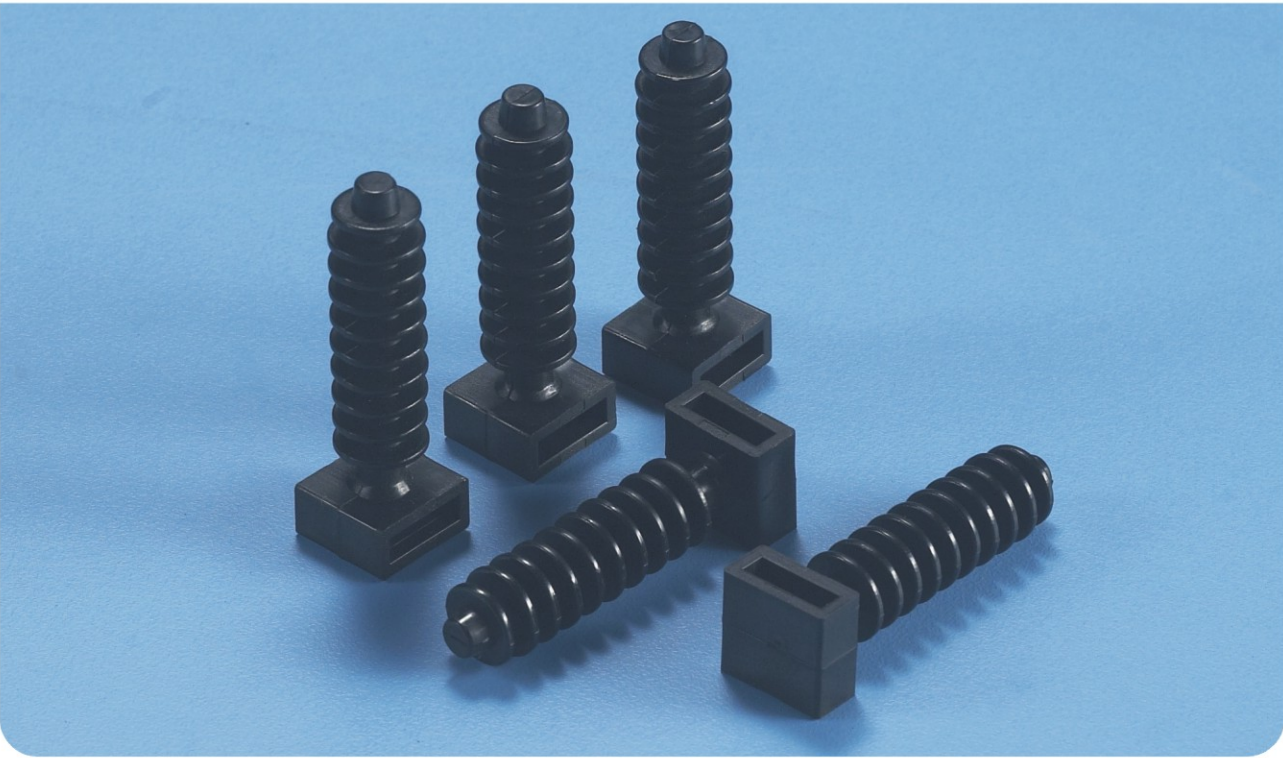

XG扎带固定座
Cable Tie Holder

材質：采用PA料製成。
顏色：白、黑。


Material: Made of PA.
Color: White, Black.

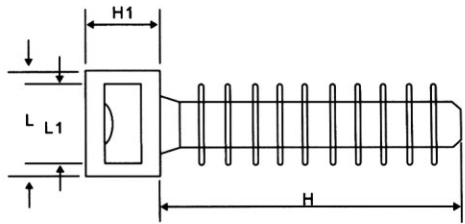

型號 ITEM NO.	H	H1	W	L	L1	包裝 PACKING
XGS-8	37	6.0	10	12.7	9.7	100PCS

index

索引

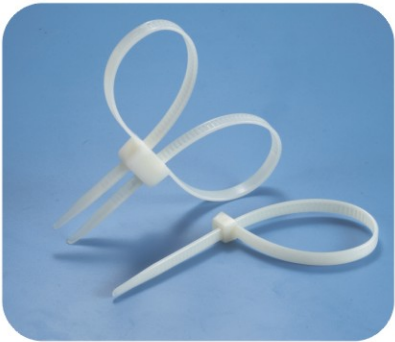

XGS-001



XGS-002



XGS-003



XGS-004



XGS-005




XGS-006



XGS-007



XGS-008

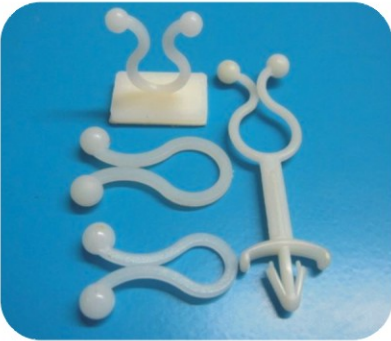


XGS-009



XGS-010



XGS-011

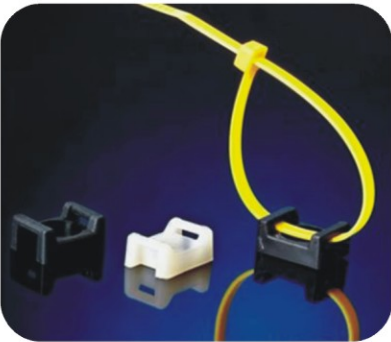

XGS-012